

LPG Hose

Description: RC-8R/L, 1/2" ID Heavy Duty High Pressure LPG/NAT gas hose available in bulk footage or in UL 21 listed assemblies for OEM, industrial, agricultural and RV applications.

Applications:

- Agricultural Weed Burners
- Poultry and Pig (swine, hogs) House Sanitization Equipment
- Chicken, Turkey and Pig Confinement Heater Connectors
- RV Trunk Line connections
- Large volume LPG Generators
- Construction Heaters
- Temporary supply connections
- On-site Incinerators
- Hot Tar Roofing Kettle Supply
- Delivery Hoses

Benefits:

The H-RC-8 is an economical, however extremely durable alternative to traditional 1/2" rubber hoses. As a UL 21 licensed assembler stocking a wide variety of fittings we can build length specific connectors to fit any application.

Features:

- UV/Ozone resistant cover
- Excellent abrasion resistance
- Lighter weight and more economical than rubber hoses
- Good low temperature performance
- Low permeation

Construction:

Tube - Proprietary PVC/Rubber blended compound
Reinforcement - High tensile strength synthetic yarn
Black Cover - UV & Ozone resistant compound

Specifications:


UL 21 Listed hose available
UL 569 Recognized and CSA listed to CAN1-8.3 (Type 1 Hose)
Temp Range: -40 deg. F to 140 deg. F (-40 deg. C to 60 deg. C)
Working Pressure: 350 PSI
Packaged in 300' bulk coils or 500' bulk length reels
Assemblies available: any length, with a wide selection of fitting combinations.



Industrial Hose and Tubing Products

• Petroleum Transfer

- Food & Beverage
- Potable Water
- Landscape / Irrigation
- Commercial Growers
- Air Service

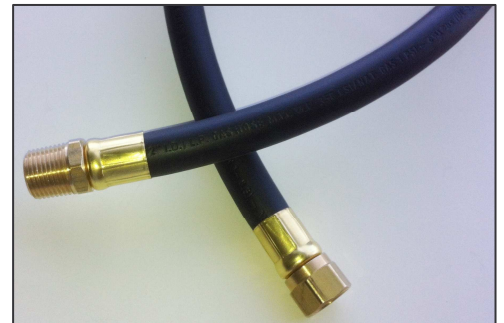

Toll Free: 1-800-978-2667

1100 Civic Center Loop, San Marcos, TX 78666
Fax: 1-512-558-2492, flex@flex-tech-hose.com

Copyright 2006: Flex-Tech Hose & Tubing Inc.

Flex-Tech

FLEX-TECH **HOSE & TUBING, INC.**

TEV – EVA TUBING (18%VA)

DESCRIPTION: ETHYL VINYL ACETATE (EVA) TUBING, SEMI-TRANSLUCENT, FOR USE WITH ANHYDROUS AMMONIA LIQUID, HERBICIDES, PESTICIDES, LIQUID FERTILIZERS AND MOST OTHER CHEMICALS.

MARKING: PRINT SERIES WILL BE PRINTED IN BLACK INK (BLACK EVA IS UNBRANDED) AND REPEAT AT A MAXIMUM OF 24" INTERVALS. CUSTOM PRINT SERIES AVAILABLE, MINIMUM ORDER QUANTITIES APPLY.

PRINT SERIES: **FLEX-TECH ANHYDROUS AMMONIA LIQUID FERTILIZER (I.D.)" EVA MADE IN USA**

NOTE: * (I.D.) DESIGNATES THE SIZE OF THE HOSE IN FRACTIONS OF AN INCH

APPROXIMATE WT.:
 1/4" – .041 LBS / FT
 3/8" – .054 LBS / FT
 1/2" – .070 LBS / FT
 5/8" – .082 LBS / FT
 3/4" – .097 LBS / FT
 1" – .127 LBS / FT

MATERIAL: EVA – 18% VA CONTENT
 SILICONE FREE
 FDA 21 CFR 176.170 AND 177.1350
 CLEAR, BLACK (CUSTOM COLORS AVAILABLE, MIN. ORDER QUANTITIES APPLY)

SERVICE TEMP.: -50°F TO +125°F (-45°C TO +52°C)

WORKING PRESSURE: SEE CHART BELOW
 3:1 SAFETY FACTOR

PACKAGING: 25', 50' AND 100' CONTINUOUS LENGTH COILS
 VARIOUS LENGTH BULK COILS AVAILABLE WITH A MAXIMUM OF ONE SPLICE PER COIL

SPECIFICATIONS:

PART NUMBER	I.D.	O.D.	WORKING PRESSURE @68°F	BULK COIL LENGTH
TEV04090_-00	1/4"	.430"	150	300' OR 500'
TEV06090_-00	3/8"	.555"	125	300' OR 500'
TEV08090_-00	1/2"	.680"	100	300' OR 500'
TEV10090_-00	5/8"	.805"	80	300'
TEV12090_-00	3/4"	.930"	65	250'
TEV16090_-00	1"	1.180"	45	200'